

AL14

TELESCOPIC JIB 14T CAPACITY

GENERATION

S


HIGH-LIGHTS

- > **REMOVABLE HOOK** or with safety latch
- > **THE MARREL TILTING FRAME** provides unmatched lifting capacity
- > **SHOT BLASTING AND PAINTING** before assembly
- > **CUSTOMIZATION:** color on demand and wide range of accessories
- > **OPTIMIZED EQUIPMENT HEIGHT**
- > **END-OF-STROKE DAMPER INTEGRATED** into the arm cylinders

AMPLIROLL® HIGH

AL14

TELESCOPIC JIB
14T CAPACITY

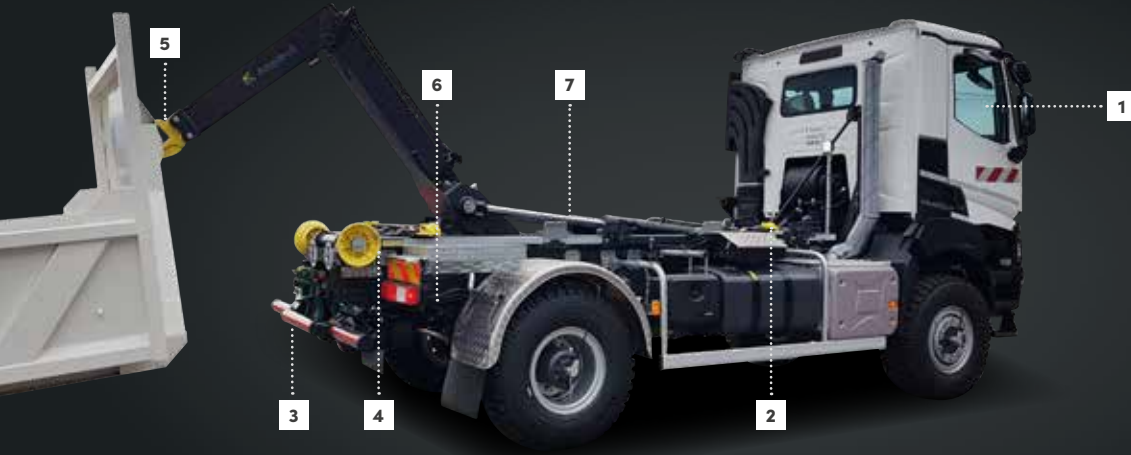

OPTIONS



Available controls:
electrical, radio
control



Front hydraulic
locks



PANTO rear
underrun protection
adjustable or fixed



Additional
hydraulic lines (for
cranes, rear tipper
trailer...)



Hook with
mechanical or
pneumatic safety
latch



Vehicle stability
systems



Attachments
brackets suited
for various truck
models

Other options available for custom configuration

FICHEPRODUIT/AL14/042021/500EN — oh!studio (r)

TECHNICAL DATA

For GVW 12 to 26 T		S40	S41	S42	S43	S44	S45	S46	S47	S48	S49	S50	S51	S52	S53
	Min. container length (mm)	3 700	3 700	3 700	3 700	4 000	3 700	4 000	4 000	4 000	4 000	4 100	4 300	4 300	4 400
	Max. container length (mm)	5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300	6 400
	Container length with fixed RUP (mm)	4 500	4 600	4 700	4 800	4 900	5 000	5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800
	Weight (kg)	1 650	1 650	1 675	1 675	1 700	1 700	1 725	1 750	1 750	1 750	1 750	1 950	1 950	1 950

For GVW 12 to 26 T		S54	S55	S56	S57	S58
	Min. container length (mm)	4 600	4 600	4 600	4 600	4 600
	Max. container length (mm)	6 500	6 700	6 800	6 900	7 000
	Container length with fixed RUP (mm)	5 900	6 000	6 100	6 200	6 300
	Weight (kg)	2 075	2 090	2 095	2 095	2 100

Subject to technical modification; data not binding.
Depending on the market. Chassis recommended.

+33 (0)4 77 36 28 28
42 avenue de Saint-Étienne – BP70056
42161 Andrézieux-Bouthéon cedex
FRANCE

@marrelsas

MARREL
FASSI GROUP

AMPLIROLL® HIGH

MARREL.COM