

FASSI GROUP

AL15PA

TELESCOPIC AND ARTICULATED JIB 16T CAPACITY



- > GREATER RANGE of container lengths


LIGHT

- > WELDED HOOK with pneumatic safety latch
- > THE MARREL TILTING FRAME provides unmatched lifting capacity
- > REDUCTION OF LOADING ANGLE > SHOT BLASTING AND PAINTING before assembly
 - > CUSTOMIZATION: color on demand and wide range of accessories
 - > OPTIMIZED EQUIPMENT HEIGHT
 - > END-OF-STROKE DAMPER **INTEGRATED** into the arm cylinders

FICHEPRODUIT/AL16PA/042021/500EN — ohistudio (.fr)

AL15PA

TELESCOPIC AND ARTICULATED JIB 16T CAPACITY

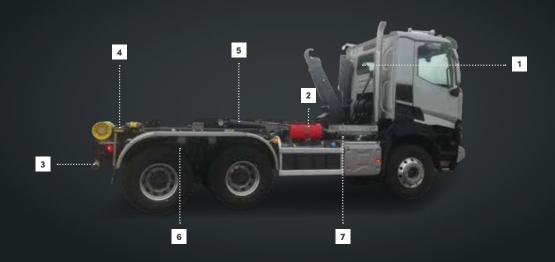

OPTIONS



Available controls: electrical, radio control



Front hydraulic locks



PANTO rear underrun protection adjustable or fixed



Additional hydraulic lines (for cranes, rear tipper trailer...)



High speed



Vehicle stability systems



Attachments brackets suited for various truck models

Other options available for custom configuration

TECHNICAL DATA

For GVW 15 to 26 T chassis		S44	S45	S46	S47	S48	S49	S50	S51	S52	S53	S54	S55	S56	S57	S58
- LG -	Min. container length (mm)	3 200	3 200	3 200	3 200	3 200	3 200	3 500	3 500	3 500	3 800	3 800	3 800	3 800	3 800	3 900
	Max. container length (mm)	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300	6 400	6 500	6 700	6 800	6 900	7 000
	Container length with fixed RUP (mm)	4 900	5 000	5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300
Kg	Weight (kg)	1 900	1 900	1 925	1 925	1 950	1 975	1 975	1 975	2 115	2 135	2 175	2 245	2 245	2 250	2 255

Subject to technical modification; data not binding. Depending on the market. Chassis recommended.





