


AL6

TELESCOPIC JIB 5.6T CAPACITY

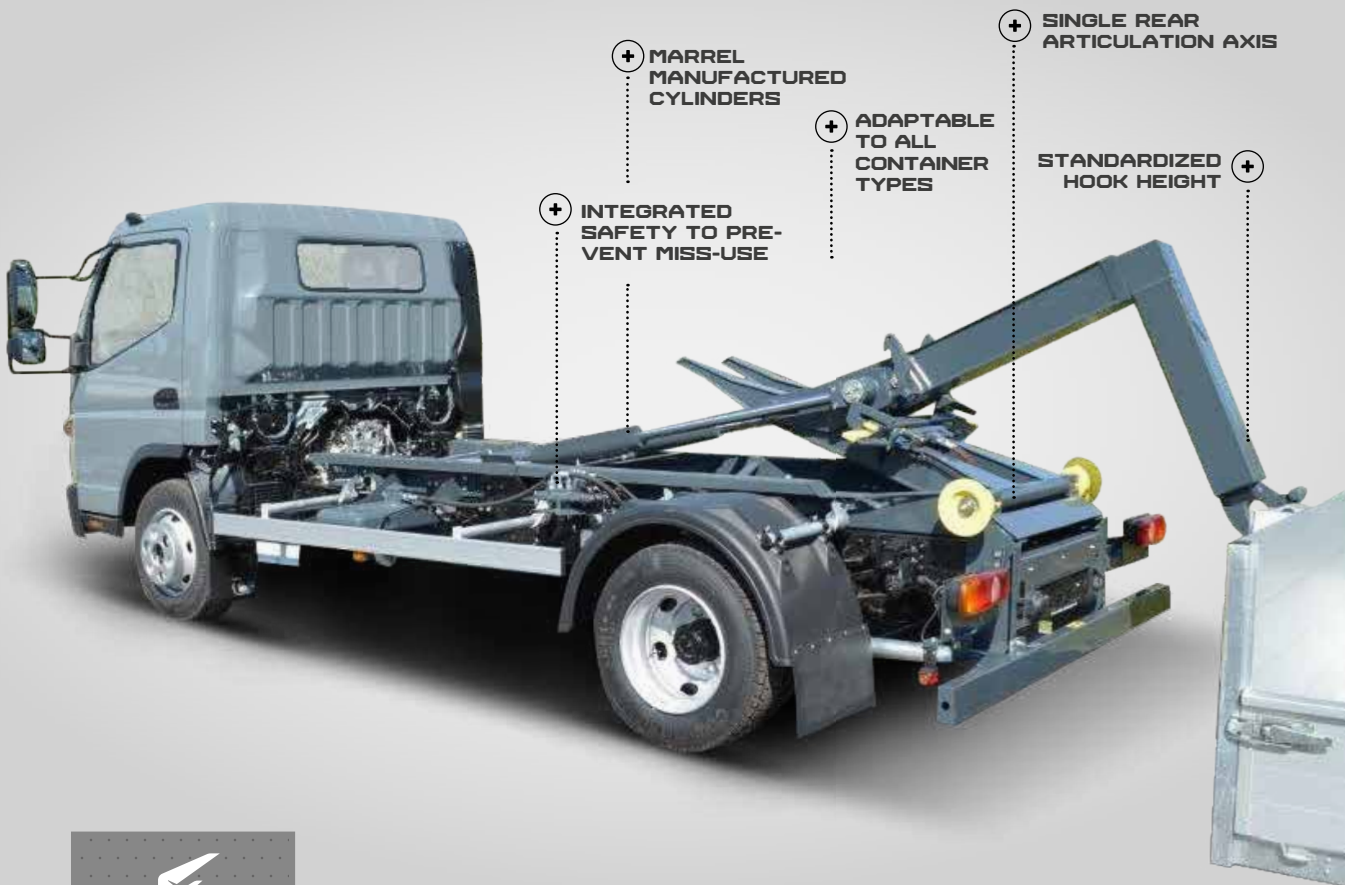


HIGH-LIGHTS

- > **THE MARREL TILTING FRAME**
provides unmatched lifting capacity
- > **OPTIMIZED EQUIPMENT HEIGHT**
- > **OPTIMIZED WEIGHT FOR MAXIMUM USEFUL LOAD**
- > **MAGNETIZED REMOVABLE CONTROL WITH DIGITAL SCREEN**
- > **COMPONENTS SHOT-BLASTED**
before assembly
- > **ADAPTABLE TO ALL CHASSIS TYPES**

AL6

TELESCOPIC JIB
5.6T CAPACITY

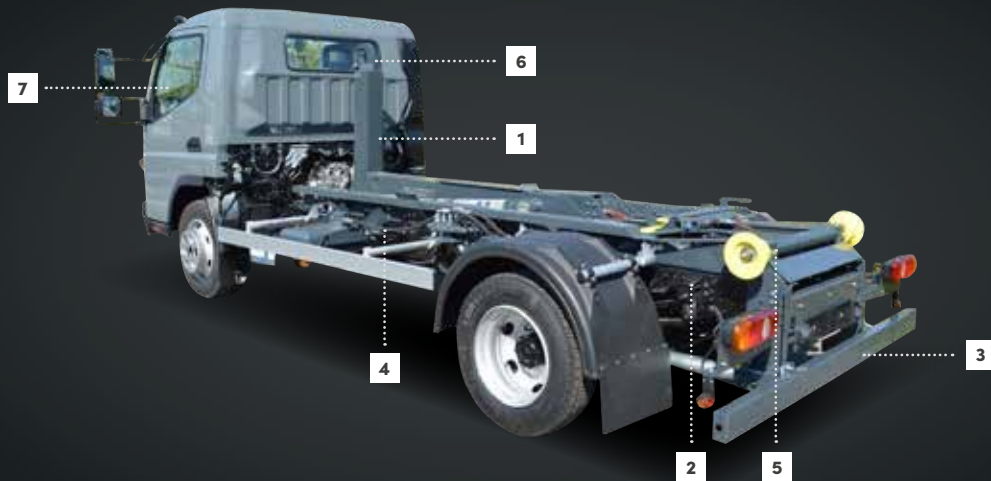

OPTIONS



Various hook heights from 920mm to 1570mm



Attachments brackets suited for various truck models



Extendable rear underrun protection



12V and 24V versions



Double track width 850 mm and 1060 mm



Mechanical safety latch



Available controls: pneumatic

Other options available for custom configuration

FICHEPRODUIT/AL6/042021/500EN — ohlistuola (fr)

TECHNICAL DATA

For GVW 7.5 to 10 T		A29	A32	A33	A34
	Min. container length (mm)	2 700	3 000	3 000	3 000
	Max. container length (mm)	3 800	4 100	4 200	4 300
	Container length with fixed RUP (mm)	3 200	3 500	3 600	3 700
	Weight (kg)	700	750	750	750

Subject to technical modification; data not binding.
Depending on the market. Chassis recommended.

AMPLIROLL® URBAN & FLEX

+33 (0)4 77 36 28 28
42 avenue de Saint-Étienne – BP70056
42161 Andrézieux-Bouthéon cedex
FRANCE

@marrelsas

MARREL
FASSI GROUP

MARREL.com