

ALBAZOPA



HIGH TENSILE STEEL +

REINFORCED ARTICULATION PARTS FOR HIGH-STRESS AREAS +

INTEGRATED SAFETY TO PREVENT MISS-USE +

MARREL MANUFACTURED CYLINDERS +




HIGH-LIGHTS


- > **OPTIMIZATION AND REDUCTION** of loading angle
- > **EXCELLENT WEIGHT-TO-POWER RATIO**
- > **GRIP BELOW** ground level and unmatched pullout capacity
- > **OPTIMIZED EQUIPMENT HEIGHT**
- > **WELDED HOOK** with pneumatic safety latch
- > **END-OF-STROKE DAMPER** integrated into the arm cylinders

AMPLIROLL® HIGH

ALBA20PA

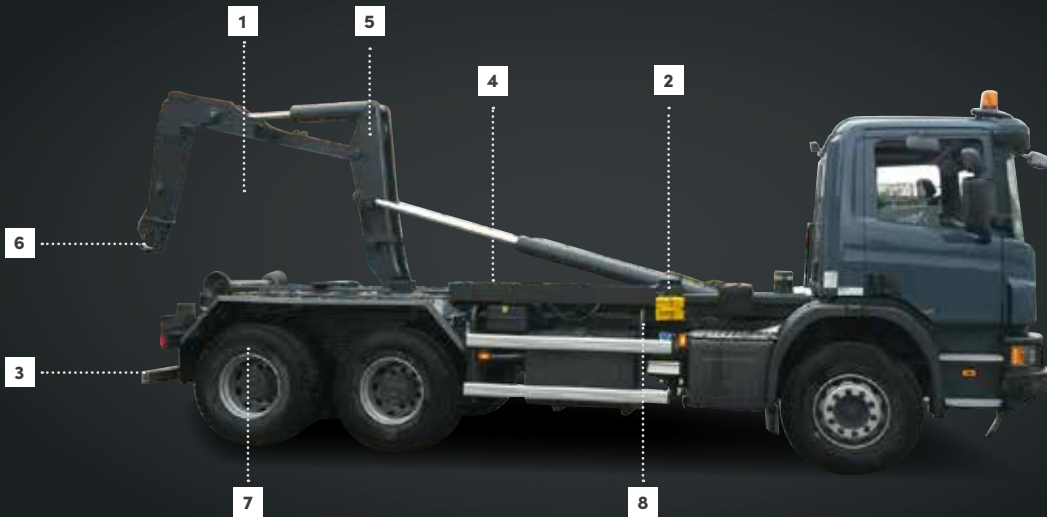

OPTIONS



1 Rear loading axis elevator




2 Front hydraulic locks




3 PANTO rear underrun protection adjustable or fixed



4 Additional hydraulic lines (for cranes, rear tipper trailer...)



5 High speed



6 Hook with mechanical or pneumatic safety latch



7 Vehicle stability systems



8 Attachments brackets suited for various truck models

Other options available for custom configuration

FICHEPRODUIT/ALBA20PA/042021/500EN — ohstudio (r)

TECHNICAL DATA

For GVW from 26T	A50	A53	A56
 Min. container length (mm)	4 200	4 500	4 800
Max. container length (mm)	6 200	6 600	6 900
Container length with fixed RUP (mm)	5 400	5 700	6 000
 Weight (kg)	2 520	2 570	2 670

Subject to technical modification; data not binding.
Chassis recommended. Depending on the market.

AMPLIROLL® HIGH

+33 (0)4 77 36 28 28
42 avenue de Saint-Étienne – BP70056
42161 Andrézieux-Bouthéon cedex
FRANCE

in f @marrelsas



MARREL.COM