


# AL10

## TELESCOPIC JIB 9.6T CAPACITY




### HIGH-LIGHTS


- > **THE MARREL TILTING FRAME** provides unmatched lifting capacity
- > **OPTIMIZED EQUIPMENT HEIGHT**
- > **OPTIMIZED WEIGHT** for maximum useful load
- > **COMPONENTS SHOT-BLASTED** before assembly
- > **ADAPTABLE TO ALL CHASSIS TYPES**
- > **GREAT DEPTH OF RANGE**

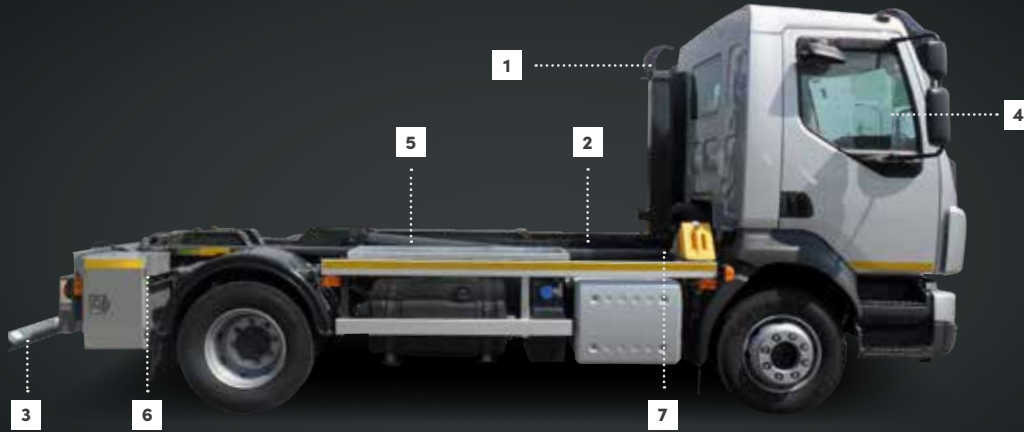


## OPTIONS

- 


**1**

Mechanical safety latch
- 


**2**

Front hydraulic lock
- 


**3**

PANTO rear underrun protection extendable or fixed
- 


**4**

Available controls: electrical, radio control
- 

**5**

Additional hydraulic lines (for cranes, rear tipper trailer...)
- 

**6**

Vehicle stability systems
- 

**7**

Attachments brackets suited for various truck models

Other options available for custom configuration

FICHEPRODUIT/AL10/042021/500EN — oh!studio (rfr)

## TECHNICAL DATA

For GVW 9 to 15 T		A34	A35	A36	A37	A38	A39	A40	A41
	Min. container length (mm)	3 300	3 300	3 300	3 300	3 300	3 500	3 500	3 500
	Max. container length (mm)	4 400	4 500	4 600	4 800	5 000	5 100	5 200	5 300
	Container length with fixed RUP (mm)	3 900	4 000	4 100	4 200	4 300	4 400	4 500	4 600
	Weight (kg)	1 020	1 020	1 020	1 020	1 050	1 100	1 100	1 100

Subject to technical modification; data not binding.  
Depending on the market. Chassis recommended.

+33 (0)4 77 36 28 28  
42 avenue de Saint-Étienne – BP70056  
42161 Andrézieux-Bouthéon cedex  
FRANCE

@marrelsas