


FASSI GROUP

MB14

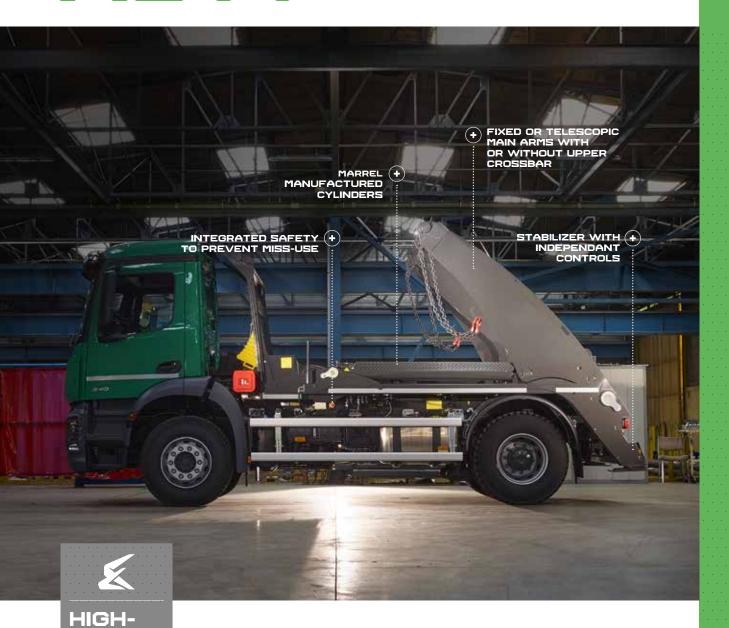

> SEPARATELY AND SIMULTANEOUSLY CONTROLLED

telescopic units

- > INTEGRATED STABILIZERS AND REAR UNDERRUN PROTECTION
- > ANTI-CORROSION TREATMENT: shot blasting of fabricated components
- > FRONT PLANKING WITH ADAPTABLE TRAYS
- > SIDE AND FRONT CONTAINER CHOCKING
- > APPROVED LIFTING CHAINS and swivels with safety latch



OPTIONS



Available controls: radio control



Skiploader on cradle



Roller stands or pivoting runners



High speed



Side hydraulic lock



Rear spreader with 1, 2 or 3 hooks

FICHEPRODUIT/MB14/042021/500EN — ohistudio (.fr)



Rear chains for better tilting



Attachments brackets suited for various truck models

Other options available for custom configuration

TECHNICAL DATA

		FIXED	TELESCOPIC	FIXED WITH CROSSBAR	TELESCOPIC WITH CROSSBAR
-		MB 14F	MB 14T	MB 14 FES	MB 14 TES
Lifting capacity: Container placed on ground					
Depending on loading radius	2.880 mm	14 000 kg	14 000 kg	14 000 kg	14 000 kg
	3.100 mm 3.300 mm	12 700 kg 11 700 kg		12 700 kg 11 700 kg	
	4.330 mm		10 000 kg		10 000 kg
Weight		3 000 kg	3 250 kg	3 050 kg	3 340 kg
Container length: (Adjustable centering units)		1 610 / 1 850 mm			

Subject to technical modification; data not binding

