

AL24LP-PA


**TELESCOPIC AND
ARTICULATED JIB
24T CAPACITY**

HEIGHT OF
195 MM
HIGHER <
PRODUCTIVITY

FREE TILTING FRAME
AND BOOSTER
SYSTEM

SMOOTH LIFTING
MANAGEMENT

CAST PARTS
FOR HIGH-STRESS
AREAS

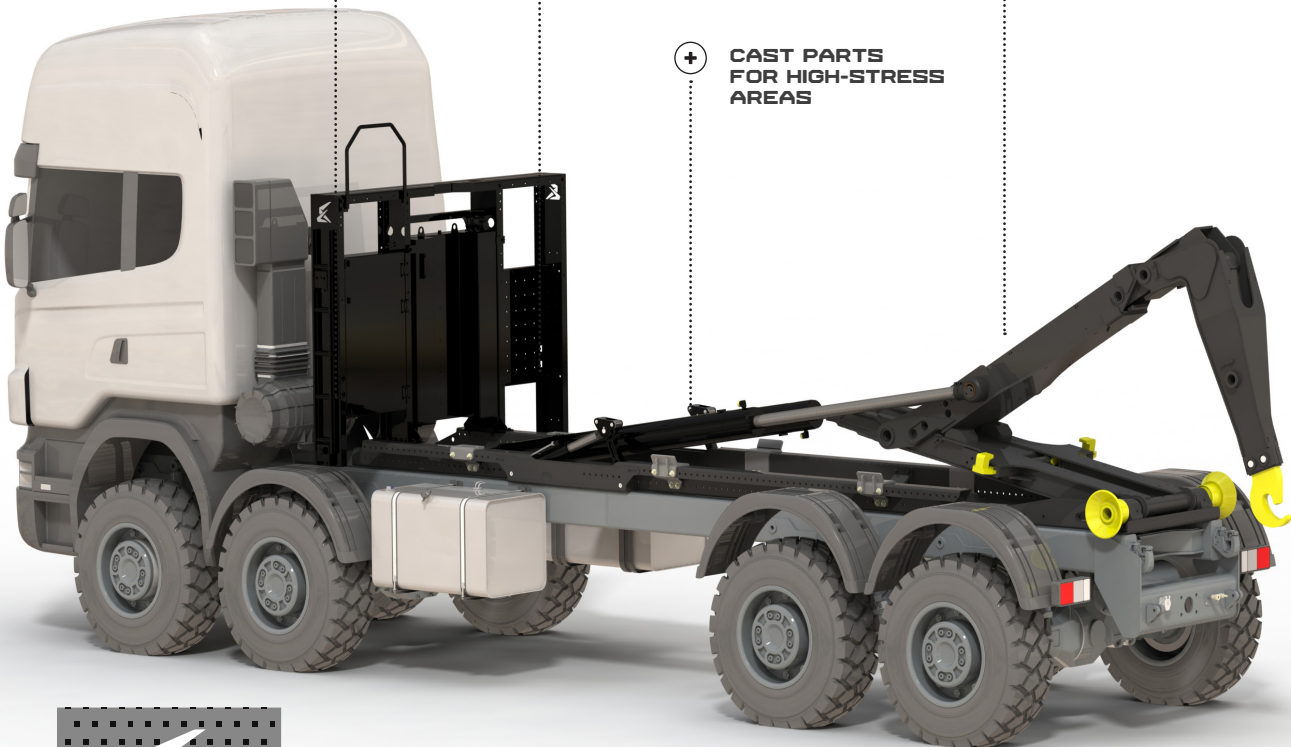

HIGH-LIGHTS

> POWERFUL

Unique tilting frame and boosters system to provide **unmatched lifting capacity**

Higher productivity thanks to the available space

> CONVENIENT

Ease of use thanks to the new **Ampli'Drive hydraulics solution**

> VERSATILE

Lengths from 49 to 61 available and customization possibilities

> ROBUST

High quality strength steels

AMPLIROLL® HIGH

AL24LP-PA

TELESCOPIC AND ARTICULATED JIB
24T CAPACITY



OPTIONS AND ACCESSORIES



Hooks selection
Heights & types



Rear Hydraulic Locking




Front Hydraulic Boxes & Oiltank



Ampli'Drive Controls
• Fast speed
• Sequence control



Free Glide
• Frictionless drive



Hydraulic bypass



Rear Underrun Protection
• Fixed • Telescopic
• Panto • Inclined

Additional options & accessories available for customized configuration

TECHNICAL DATA

For GVW from 26 T		S49	S51	S52	S53	S55	S56	S57	S58	S59	S61
	Min. container length (mm)	3 800	4 000	4 500	4 200	4 300	4 400	4 500	4 600	4 700	4 900
	Max. container length (mm)	6 100	6 300	6 800	6 500	6 700	6 800	6 900	7 000	7 100	7 300
	Container length with fixed RUP (mm)	5 100	5 300	5 800	5 500	5 700	5 800	5 900	6 000	6 100	6 300
	Weight (kg)	2 488	2 508	2 560	2 575	2 635	2 687	2 702	2 740	2 760	2 790

Subject to technical modification; data not binding.
Depending on the market. Chassis recommended.

AMPLIROLL® HIGH



MARREL
FOREVER HIGHER SINCE 1919

+33 (0)4 77 36 28 28
42 avenue de Saint-Étienne - BP 70056
42161 Andrézieux-Bouthéon cedex
FRANCE

MARREL.com

A FASSI GROUP COMPANY