



## AMPLIROLL® HIGH AL18LP-PA

TELESCOPIC AND ARTICULATED JIB  
CAPACITY 18T

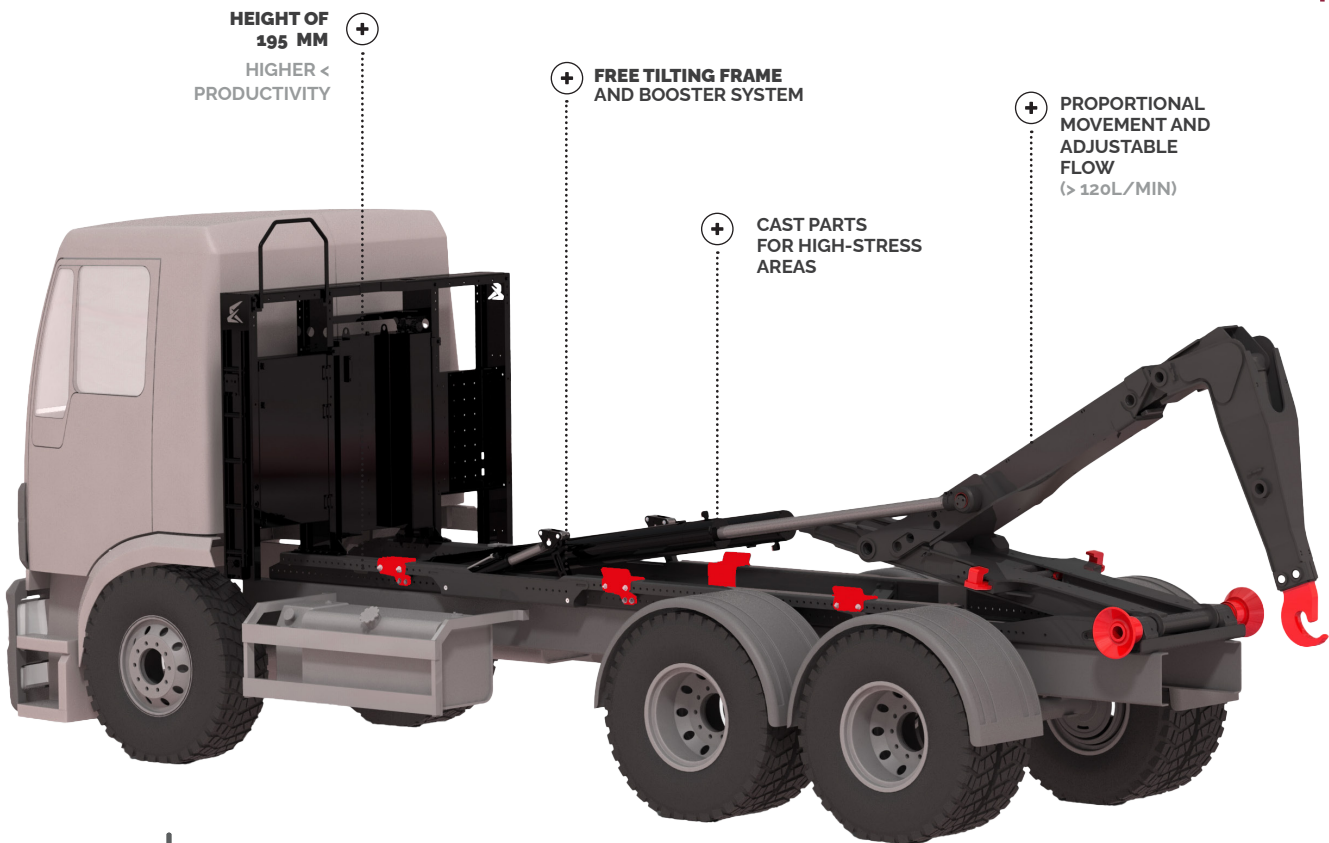

### KEY POINTS

#### POWERFUL

Unique tilting frame and boosters system to provide **unmatched lifting capacity**

**Higher productivity** thanks to the available space

#### CONVENIENT

Ergonomics with the **Ampli'Drive ProPack** Incl. proportional distribution group and electric control

#### VERSATILE








**Lengths from 49 to 61** available and customization possibilities

#### ROBUST

**High quality strength steels (HTS)**





## OPTIONS AND ACCESSORIES

- |   |  |  |
|---|--|--|
| <p><b>1</b> </p> <p>Hooks selection<br/>Heights &amp; types</p>   | <p><b>2</b> </p> <p>Rear Hydraulic<br/>Locking</p>          | <p><b>3</b> </p> <p>Front Hydraulic<br/>Boxes &amp; Oiltank</p> |
| <p><b>4</b> </p> <p>Ampli'Drive Controls<br/>• Monitoring<br/>• Sequence control</p>                   | <p><b>5</b> </p> <p>Free Glide<br/>• Frictionless drive</p> | <p><b>6</b> </p> <p>Hydraulic<br/>bypass</p>                   |
| <p><b>7</b> </p> <p>Rear Underrun Protection (RUP)<br/>• Fixed • Telescopic<br/>• Panto • Inclined</p> |  |  |

additional options 1 accessories available for customized configuration

## TECHNICAL DATA

For GVW from 26 T		S49	S51	S52	S53	S55	S56	S57	S58	S59	S61
	Min. container length (mm)	3 600	3 800	4 000	4 000	3 900	4 100	4 100	4 300	4 300	4 500
	Max. container length (mm)	6 100	6 300	6 400	6 500	6 700	6 800	6 900	7 000	7 100	7 300
	Container length with fixed RUP (mm)	5 300	5 500	5 600	5 700	5 900	6 000	6 100	6 200	6 300	6 500
	Weight (kg)	2 317	2 347	2 394	2 409	2 460	2 508	2 523	2 560	2 580	2 610

Subject to technical modification; data not binding.  
Depending on the market. Chassis recommended