


AMPLIROLL® HIGH AL22LP

TELESCOPIC JIB
CAPACITY 22T

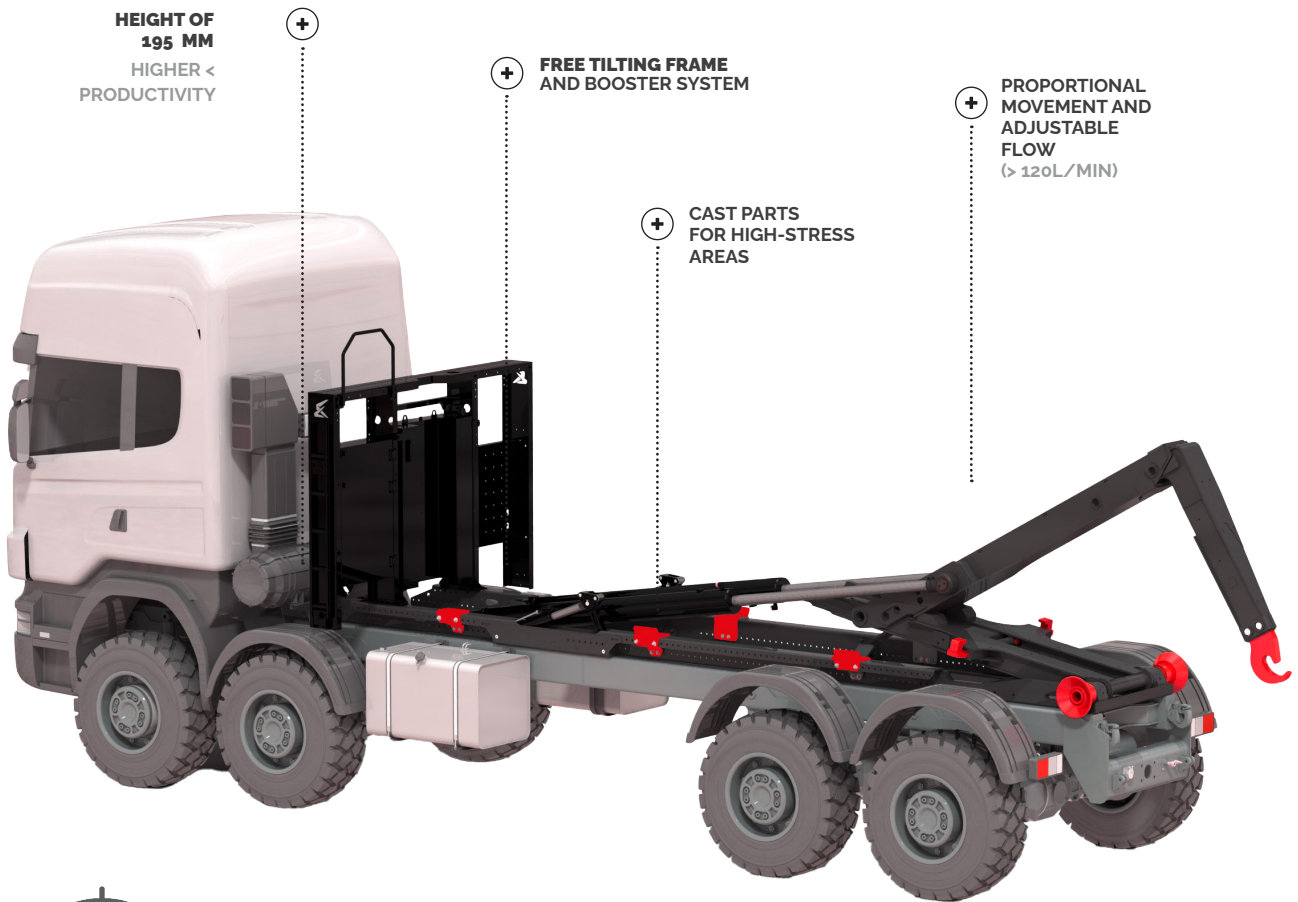


HEIGHT OF
195 MM
HIGHER <
PRODUCTIVITY

FREE TILTING FRAME
AND BOOSTER SYSTEM

CAST PARTS
FOR HIGH-STRESS
AREAS

PROPORTIONAL
MOVEMENT AND
ADJUSTABLE
FLOW
(> 120L/MIN)



KEY POINTS

POWERFUL

Unique tilting frame and boosters system to provide **unmatched lifting capacity**

Higher productivity thanks to the available space

CONVENIENT

Ergonomics with the **Ampli'Drive ProPack** Incl. proportional distribution group and electric control

VERSATILE








Lengths from 49 to 61 available and customization possibilities

ROBUST

High quality strength steels (HTS)





OPTIONS AND ACCESSORIES

- | | | |
|---|--|--|
| <p>1 </p> <p>Hooks selection
Heights & types</p> | <p>2 </p> <p>Rear Hydraulic
Locking</p> | <p>3 </p> <p>Front Hydraulic
Boxes & Oiltank</p> |
| <p>4 </p> <p>Ampli'Drive Controls
• Monitoring
• Sequence control</p> | <p>5 </p> <p>Free Glide
• Frictionless drive</p> | <p>6 </p> <p>Hydraulic
bypass</p> |
| <p>7 </p> <p>Rear Underrun Protection (RUP)
• Fixed • Telescopic
• Panto • Inclined</p> | | |

additional options and accessories available for customized configuration

TECHNICAL DATA

For GVW from 26T		S49	S51	S52	S53	S55	S56	S57	S58	S59	S61
	Min. container length (mm)	4 300	4 300	4 500	4 500	4 700	4 900	4 900	5 000	5 000	5 000
	Max. container length (mm)	6 100	6 300	6 400	6 500	6 700	6 800	6 900	7 000	7 100	7 300
	Container length with fixed RUP (mm)	5 300	5 500	5 600	5 700	5 900	6 000	6 100	6 200	6 300	6 500
	Weight (kg)	2 167	2 197	2 244	2 259	2 310	2 358	2 373	2 410	2 430	2 460

Subject to technical modification; data not binding.
Depending on the market. Chassis recommended.