



## AMPLIROLL® HIGH AL24LP-PA

TELESCOPIC AND ARTICULATED JIB  
CAPACITY 24T

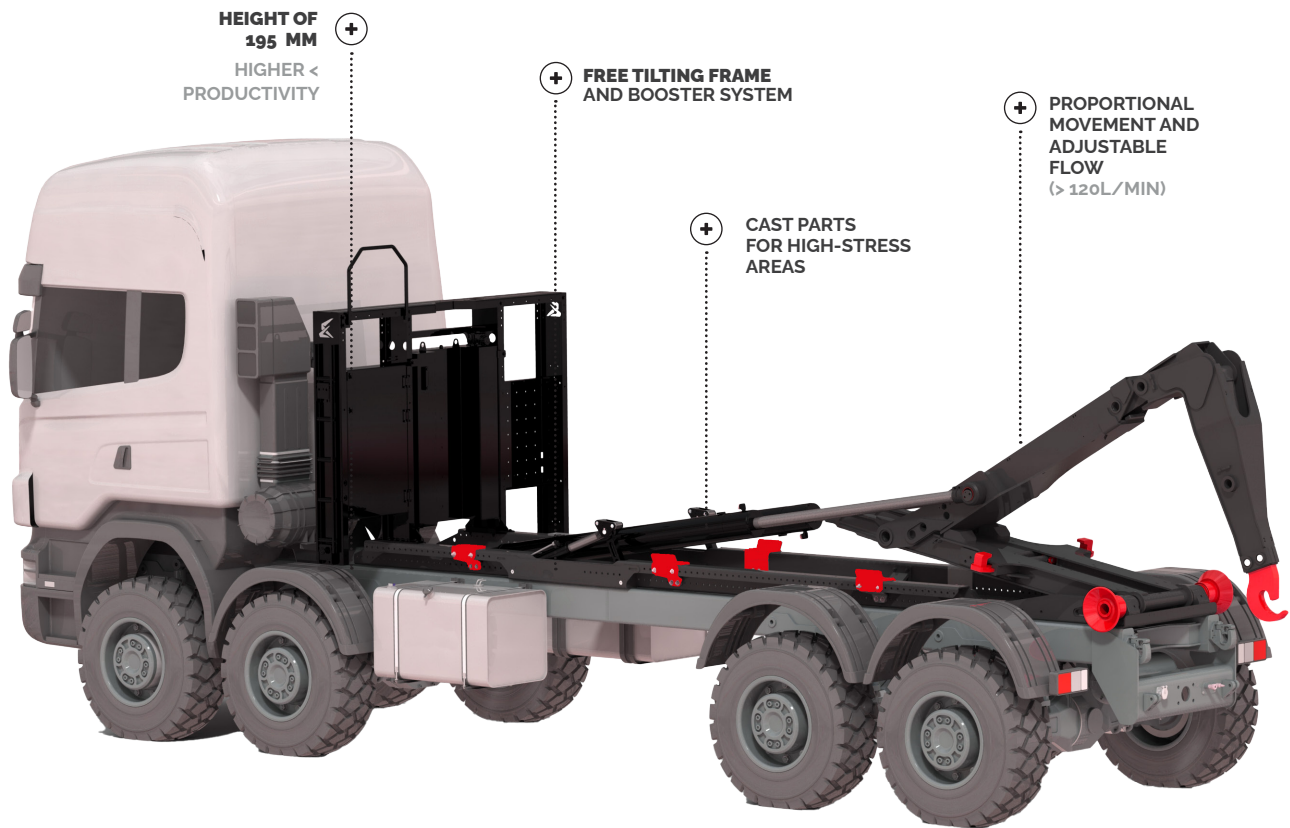

### KEY POINTS

#### POWERFUL

Unique tilting frame and boosters system to provide **unmatched lifting capacity**

**Higher productivity** thanks to the available space

#### CONVENIENT

Ergonomics with the **Ampli'Drive ProPack** Incl. proportional distribution group and electric control

#### VERSATILE

**Lengths from 49 to 61** available and customization possibilities

#### ROBUST

**High quality strength steels (HTS)**



## OPTIONS AND ACCESSORIES



**1** Hooks selection  
Heights & types



**2** Rear Hydraulic  
Locking




**3** Front Hydraulic  
Boxes & Oiltank



**4** Ampli'Drive Controls  
• Monitoring  
• Sequence control



**5** Free Glide  
• Frictionless drive





**6** Hydraulic  
bypass



**7** Rear Underrun Protection (RUP)  
• Fixed • Telescopic  
• Panto • Inclined

additional options 1 accessories available for customized configuration

## TECHNICAL DATA

For GVW from 26 T		S49	S51	S52	S53	S55	S56	S57	S58	S59	S61
	Min. container length (mm)	3 600	3 800	4 000	4 000	3 900	4 100	4 100	4 300	4 300	4 500
	Max. container length (mm)	6 100	6 300	6 400	6 500	6 700	6 800	6 900	7 000	7 100	7 300
	Container length with fixed RUP (mm)	5 300	5 500	5 600	5 700	5 600	6 000	6 100	6 200	6 300	6 500
	Weight (kg)	2 488	2 508	2 560	2 575	2 635	2 687	2 702	2 740	2 760	2 790

Subject to technical modification; data not binding.  
Depending on the market. Chassis recommended