


## AMPLIROLL® FLEX

# AL10

TELESCOPIC JIB  
LIFTING CAPACITY 10T

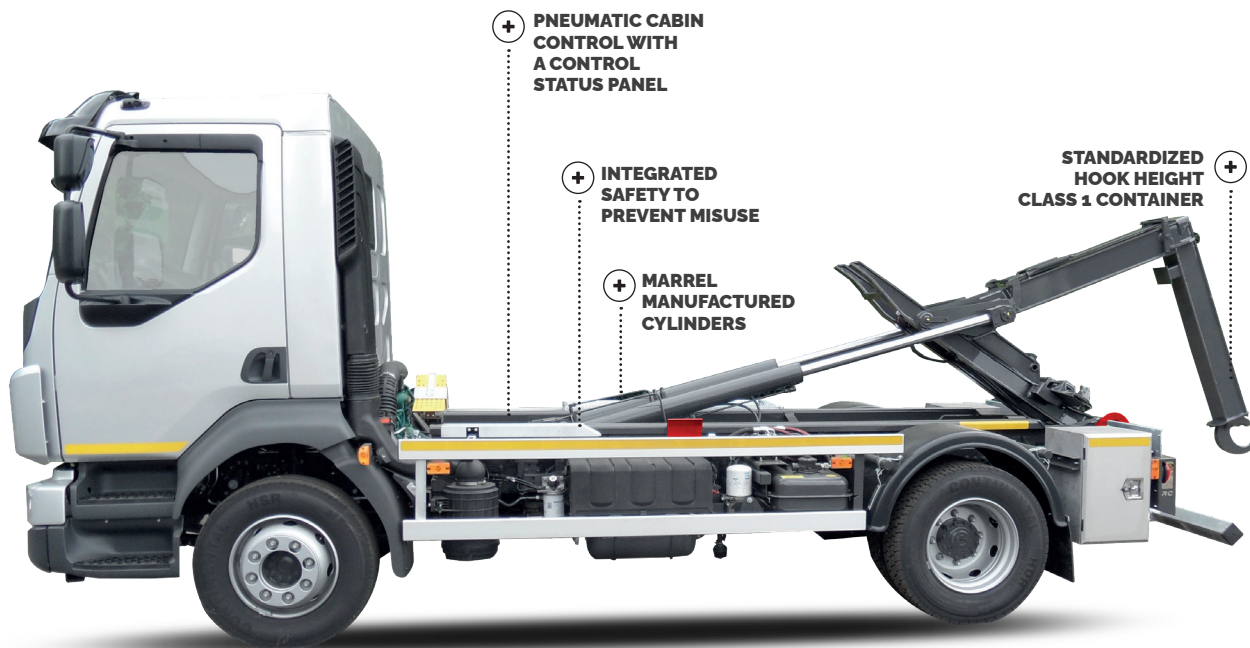

## KEY POINTS

### PRODUCTIVITY

Reduced weight for maximum payload capacity and improved performance

### VERSATILITY

Adaptability to all chassis types, from the most compact to the most specialized

### RELIABILITY

Integrated safety features to reduce handling errors

### COMFORT

Cab-mounted pneumatic control  
**Options:** electro-pneumatic control or remote radio control



## OPTIONS AND ACCESSORIES



**1** Hook with mechanical or pneumatic safety latch



**2** Front hydraulic locks



**3** Rear underrun protection (RUP)



**4** Available control option : electrical, radio controls



**5** Additional hydraulic lines (for cranes, rear tipper trailer...)



**6** Vehicle stability systems



**7** Attachments brackets suited for various truck models

Non-exhaustive list – many other options are available to customize your equipment

## TECHNICAL DATA

For GVW 9 to 15 T		A34	A35	A36	A37	A38	A39	A40	A41
	Min. container length (mm)	3 300	3 300	3 300	3 300	3 300	3 500	3 500	3 500
	Max. container length (mm)	4 400	4 500	4 600	4 800	5 000	5 100	5 200	5 300
	Container length with fixed RUP (mm)	3 900	4 000	4 100	4 200	4 300	4 400	4 500	4 600
	Weight (kg)	1 020	1 020	1 020	1 020	1 050	1 100	1 100	1 100

Subject to technical modification; data not binding