


AMPLIROLL® FLEX

AL12

TELESCOPIC JIB
LIFTING CAPACITY 12T

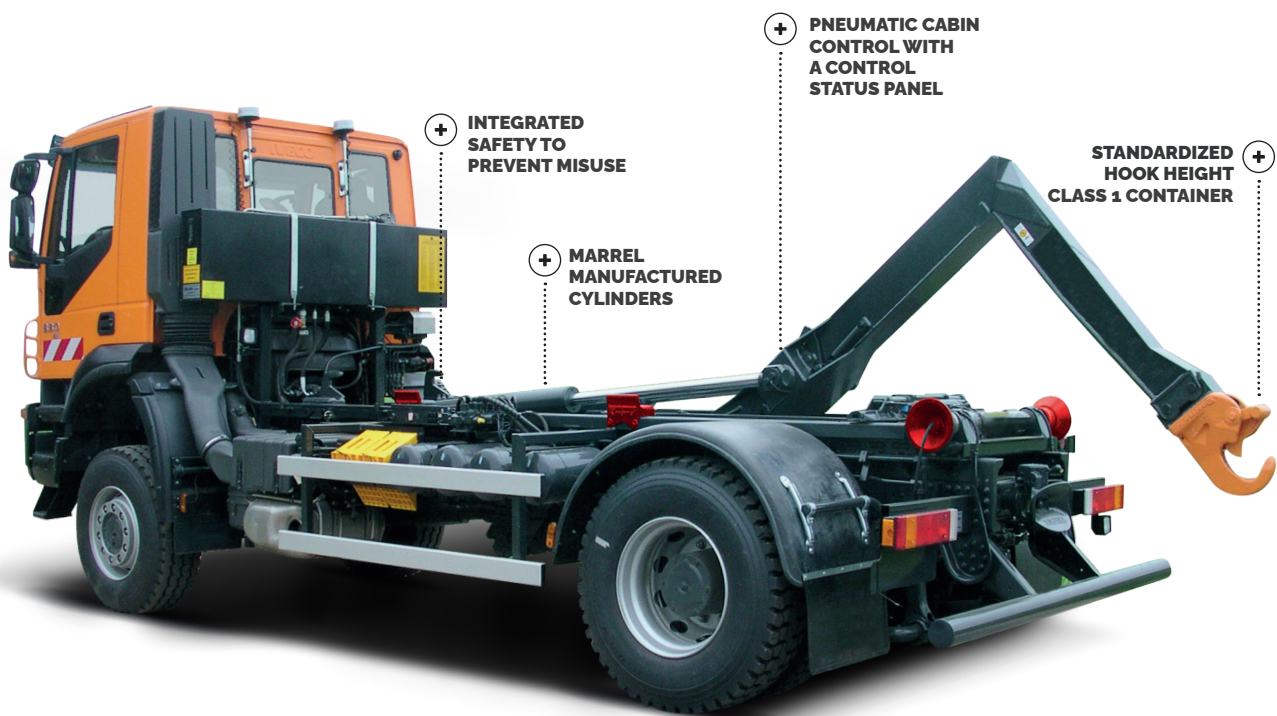

KEY POINTS

PRODUCTIVITY

Reduced weight for maximum payload capacity and improved performance

VERSATILITY

Adaptability to all chassis types, from the most compact to the most specialized

RELIABILITY

Integrated safety features to reduce handling errors


COMFORT

Cab-mounted pneumatic control
Options: electro-pneumatic control or remote radio control




OPTIONS AND ACCESSORIES


- 1**




Hook with mechanical or pneumatic safety latch
- 2**




Front hydraulic locks
- 3**




Rear underrun protection (RUP)
- 4**




Available control option : electrical, radio controls
- 5**



Additional hydraulic lines (for cranes, rear tipper trailer...)
- 6**





Vehicle stability systems
- 7**



Attachments brackets suited for various truck models

Non-exhaustive list – many other options are available to customize your equipment

TECHNICAL DATA

For GVW from 12 T	A37	A38	A39	A40	A41	A42	A43	A44	A45	A46
 Min. container length (mm)	3500	3500	3500	3700	3700	3700	3900	3900	3900	3900
Max. container length (mm)	4800	4900	5100	5200	5300	5400	5500	5600	5700	5800
Container length with fixed RUP (mm)	4100	4200	4300	4400	4500	4600	4700	4800	4900	5000
 Weight (kg)	1200	1200	1200	1220	1220	1220	1250	1250	1250	1250

Subject to technical modification; data not binding