

AMPLIROLL® HIGH


AL16

TELESCOPIC JIB
LIFTING CAPACITY 16T

AMPLI'DRIVE PACKS

- START
- OPTI
- PRO

S
GENERATION

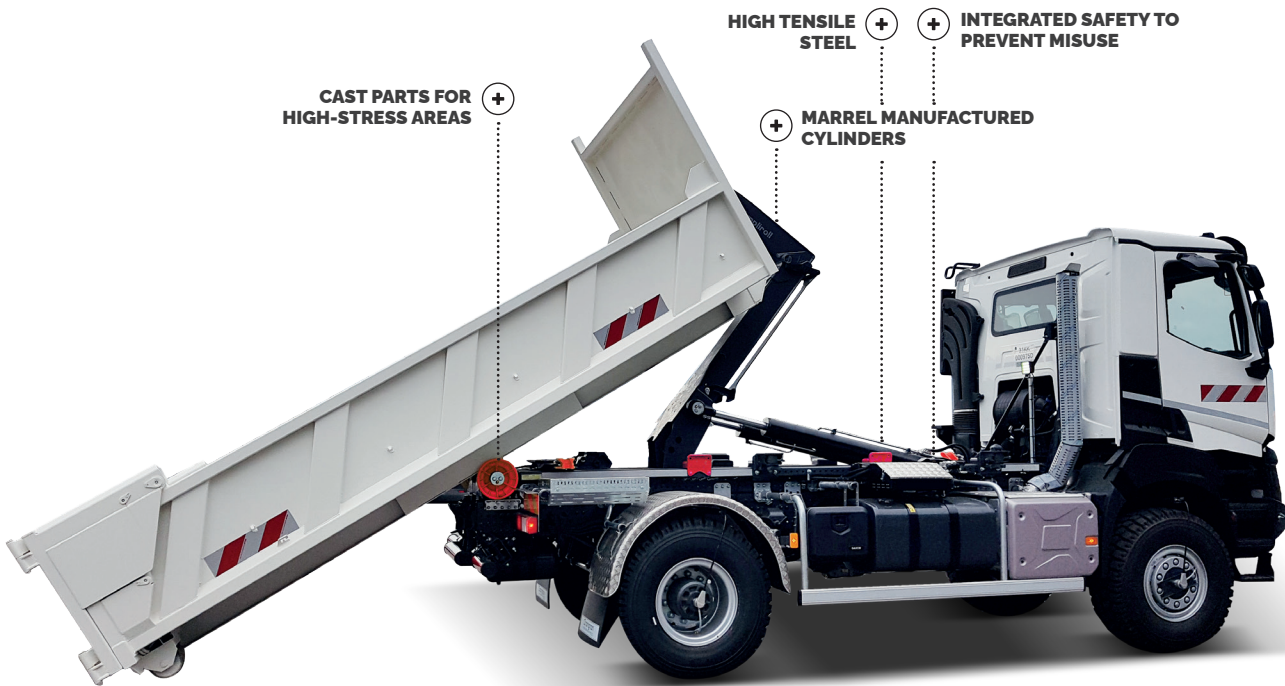

KEY POINTS

POWER

Unmatched lifting capacity thanks to the **Marrel tilting frame**

PERFORMANCE

Choose the optional **SOFT POWER** system for proportional movement and optimal comfort

ERGONOMICS


AMPLI'DRIVE control packs to meet all your needs


CUSTOMIZATION


Paint color on request and a wide range of accessories





OPTIONS


- 


1 Ampli'Drive controls: pneumatic, electrical, radio controls
- 

2 Front hydraulic locks
- 

3 Rear underrun protection (RUP)
- 

4 Additional hydraulic lines (for cranes, rear tipper trailer...)
- 

5 Hook with mechanical or pneumatic safety latch
- 



6 Vehicle stability systems
- 

7 Attachments brackets suited for various truck models

Other options available for custom configuration

TECHNICAL DATA

For GVW 15 to 26 T		S40	S41	S42	S43	S44	S45	S46	S47	S48	S49	S50	S51	S52	S53
	Min. container length (mm)	3 700	3 700	3 700	3 700	4 000	3 700	4 000	4 000	4 000	4 000	4 100	4 300	4 300	4 400
	Max. container length (mm)	5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300	6 400
	Container length with fixed RUP (mm)	4 500	4 600	4 700	4 800	4 900	5 000	5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800
	Weight (kg)	1 650	1 650	1 675	1 675	1 700	1 700	1 725	1 750	1 750	1 750	1 750	1 950	1 950	1 950

For GVW 15 to 26 T		S54	S55	S56	S57	S58
	Min. container length (mm)	4 600	4 600	4 600	4 600	4 600
	Max. container length (mm)	6 500	6 700	6 800	6 900	7 000
	Container length with fixed RUP (mm)	5 900	6 000	6 100	6 200	6 300
	Weight (kg)	2 075	2 090	2 095	2 095	2 100

Subject to technical modification; data not binding