




AMPLIROLL® HIGH


AL18

TELESCOPIC JIB
LIFTING CAPACITY **18T**

AMPLI'DRIVE PACKS

-  START
-  OPTI
-  PRO

S
GENERATION

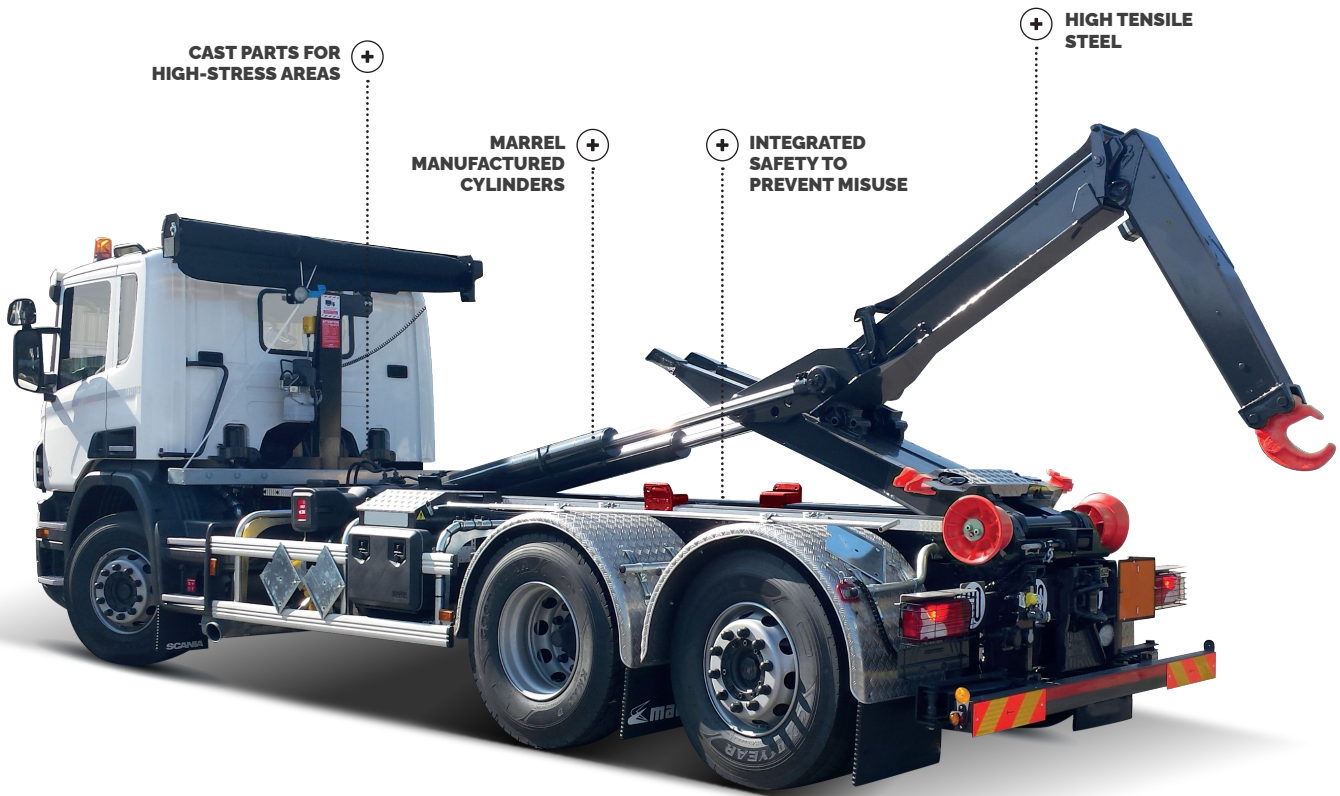

KEY POINTS

POWER

Unmatched lifting capacity thanks to the **Marrel tilting frame**

PERFORMANCE

Choose the optional **SOFT POWER** system for proportional movement and optimal comfort

ERGONOMICS








AMPLI'DRIVE control packs to meet all your needs

CUSTOMIZATION

Paint color on request and a wide range of accessories






OPTIONS

- | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <p>1  Ampli'Drive controls: pneumatic, electrical, radio controls</p> | <p>2  Front hydraulic locks</p> | <p>3  Rear underrun protection (RUP)</p> |
| <p>4  Additional hydraulic lines (for cranes, rear tipper trailer...)</p> | <p>5  Hook with mechanical or pneumatic safety latch</p> | <p>6  Vehicle stability systems</p> |
| <p>7  Attachments brackets suited for various truck models</p> | | |

Other options available for custom configuration

TECHNICAL DATA

For GVW 26 T		S40	S41	S42	S43	S44	S45	S46	S47	S48	S49	S50	S51	S52	S53
 Min. container length (mm)		3 700	3 700	3 700	3 700	4 000	3 700	4 000	4 000	4 000	4 000	4 100	4 300	4 300	4 400
 Max. container length (mm)		5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300	6 400
Container length with fixed RUP (mm)		4 500	4 600	4 700	4 800	4 900	5 000	5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800
 Weight (kg)		1 890	1 900	1 900	1 900	1 940	1 910	1 940	1 960	1 960	1 970	1 970	2 100	2 100	2 100

For GVW 26 T		S54	S55	S56	S57	S58
 Min. container length (mm)		4 600	4 600	4 600	4 600	4 600
 Max. container length (mm)		6 500	6 700	6 800	6 900	7 000
Container length with fixed RUP (mm)		5 900	6 000	6 100	6 200	6 300
 Weight (kg)		2 120	2 140	2 140	2 140	2 150

Subject to technical modification; data not binding