




## AMPLIROLL® HIGH


# AL20

TELESCOPIC JIB  
LIFTING CAPACITY **20T**

AMPLI'DRIVE PACKS

-  START
-  OPTI
-  PRO

**S**  
GENERATION

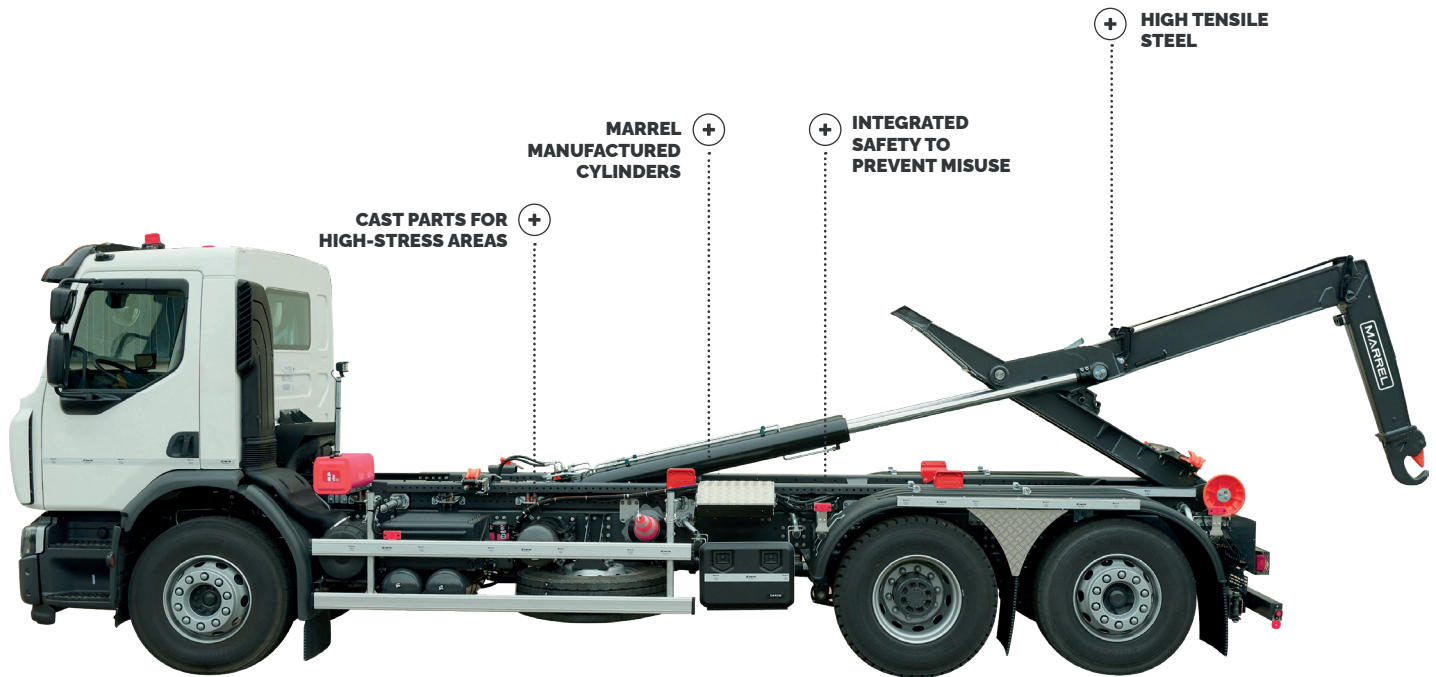

## KEY POINTS

### POWER

Unmatched lifting capacity thanks to the **Marrel tilting frame**

### PERFORMANCE

Choose the optional **SOFT POWER** system for proportional movement and optimal comfort

### ERGONOMICS

**AMPLI'DRIVE control packs** to meet all your needs

### CUSTOMIZATION

Paint color on request and a wide range of accessories



## OPTIONS



**1** Ampli'Drive controls: pneumatic, electrical, radio controls



**2** Front hydraulic locks



**3** Rear underrun protection (RUP)




**4** Additional hydraulic lines (for cranes, rear tipper trailer...)



**5** Hook with mechanical or pneumatic safety latch



**6** Vehicle stability systems



**7** Attachments brackets suited for various truck models

Other options available for custom configuration

## TECHNICAL DATA

For GVW 26 to 32 T		S44	S45	S46	S47	S48	S49	S50	S51	S52	S53	S54	S55	S56	S57	S58	S59	S60
	Min. container length (mm)	3 800	3 800	3 800	3 800	4 100	4 100	4 100	4 100	4 400	4 400	4 400	4 600	4 600	4 600	4 800	4 800	4 800
	Max. container length (mm)	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300	6 400	6 500	6 600	6 800	6 900	7 000	7 100	7 200
	Container length with fixed RUP(mm)	4 900	5 000	5 100	5 200	5 300	5 400	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300	6 400	6 500
	Weight (kg)	2 100	2 110	2 110	2 110	2 150	2 170	2 170	2 170	2 290	2 300	2 300	2 310	2 320	2 330	2 340	2 350	2 350

For GVW 26 to 32 T		SL61	SL62	SL63	SL64	SL65	SL66	SL67	SL68
	Min. container length (mm)	5 200	5 200	5 200	5 600	5 600	5 600	5 600	5 600
	Max. container length (mm)	7 300	7 400	7 500	7 600	7 700	7 800	7 900	8 000
	Container length with fixed RUP (mm)	6 600	6 700	6 800	6 900	7 000	7 100	7 200	7 300
	Weight (kg)	2 565	2 595	2 625	2 655	2 685	2 715	2 745	2 775

Subject to technical modification; data not binding