MARREL

MARREL.com

AMPLIROLL® HIGH

AL22PA

TELESCOPIC AND ARTICULATED JIB
LIFTING CAPACITY 22T

AMPLI'DRIVE PACKS
START OPTI PRO

S GENERATION

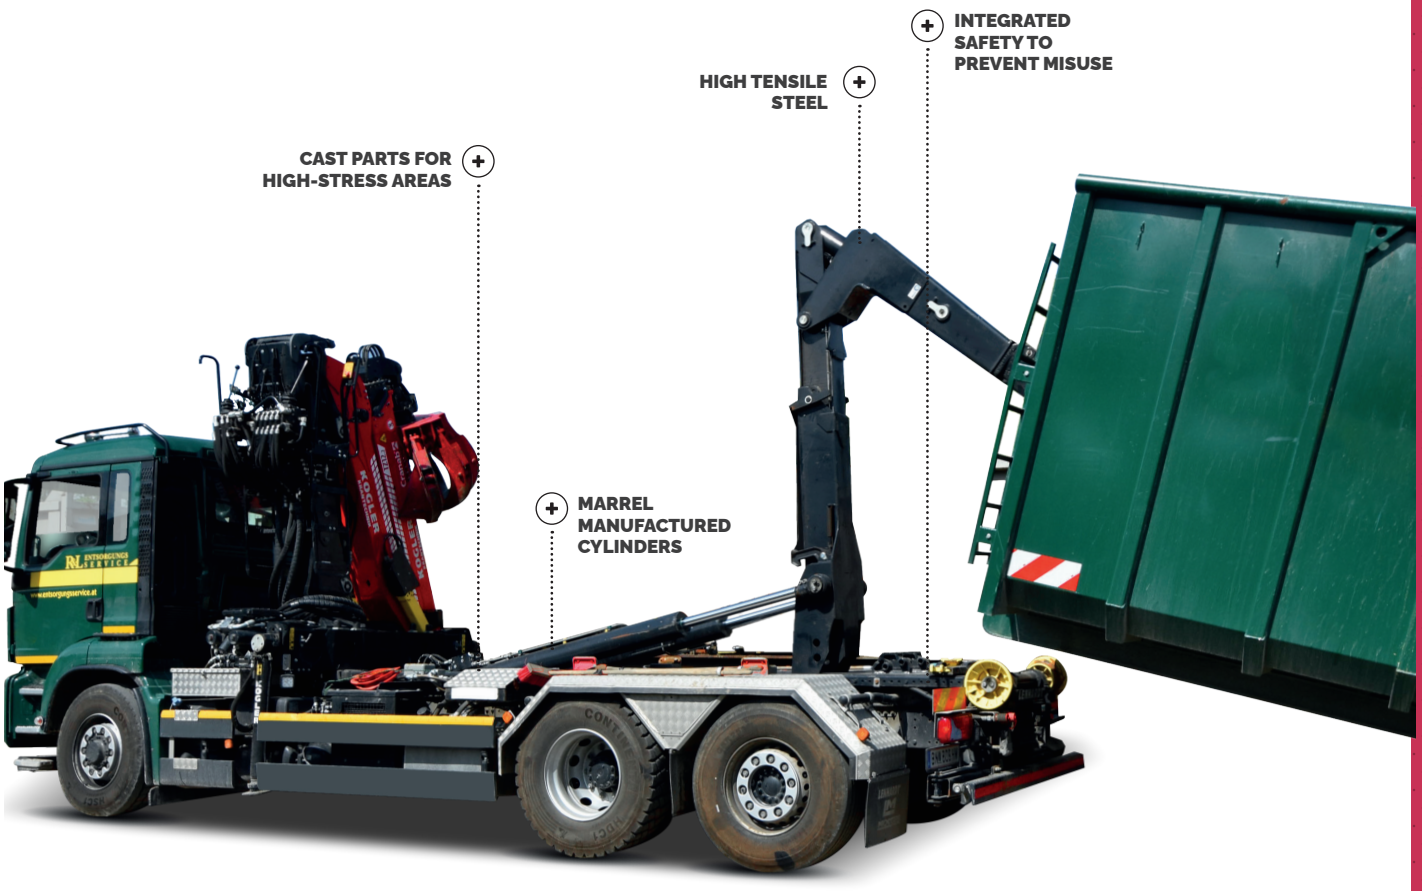

KEY POINTS

POWER

Unmatched lifting capacity
thanks to the **Marrel tilting frame**

ERGONOMICS

AMPLI'DRIVE control packs
to meet all your needs

PRODUCTIVITY

Reduced loading angle and greater
range of container lengths

ROBUSTNESS

High tensile steel
Shot blasting and painting before assembly

MARREL

OPTIONS

1 Ampli'Drive controls: pneumatic, electrical, radio controls

2 Front hydraulic locks

3 Rear underrun protection (RUP)

4 Additional hydraulic lines (for cranes, rear tipper trailer...)



5 High-speed



6 Vehicle stability systems

7 Attachments brackets suited for various truck models

Other options available for custom configuration

TECHNICAL DATA

For GVW 26 to 32 T	S48	S49	S50	S51	S52	S53	S54	S55	S56	S57	S58	S59	S60
Min. container length (mm)	3 300	3 300	3 300	3 300	3 600	3 600	3 600	3 900	3 900	3 900	3 900	3 900	4 100
Max. container length (mm)	5 900	6 000	6 100	6 200	6 300	6 400	6 500	6 600	6 800	6 900	7 000	7 100	7 200
Container length with fixed RUP (mm)	5 300	5 400	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300	6 400	6 500
Weight (kg)	2 330	2 335	2 335	2 340	2 460	2 460	2 465	2 485	2 510	2 515	2 515	2 520	2 535

For GVW 26 to 32 T	SL61	SL62	SL63	SL64	SL65	SL66	SL67	SL68
Min. container length (mm)	4 600	4 600	4 600	5 000	5 000	5 000	5 000	5 000
Max. container length (mm)	7 300	7 400	7 500	7 600	7 700	7 800	7 900	8 000
Container length with fixed RUP (mm)	6 600	6 700	6 800	6 900	7 000	7100	7 200	7 300
Weight (kg)	2 755	2 785	2 815	2 845	2 875	2 905	2 935	2 965

Subject to technical modification; data not binding

+33 (0)4 77 36 28 28
42 avenue de Saint-Étienne – BP70056
42161 Andrézieux-Bouthéon cedex - France