




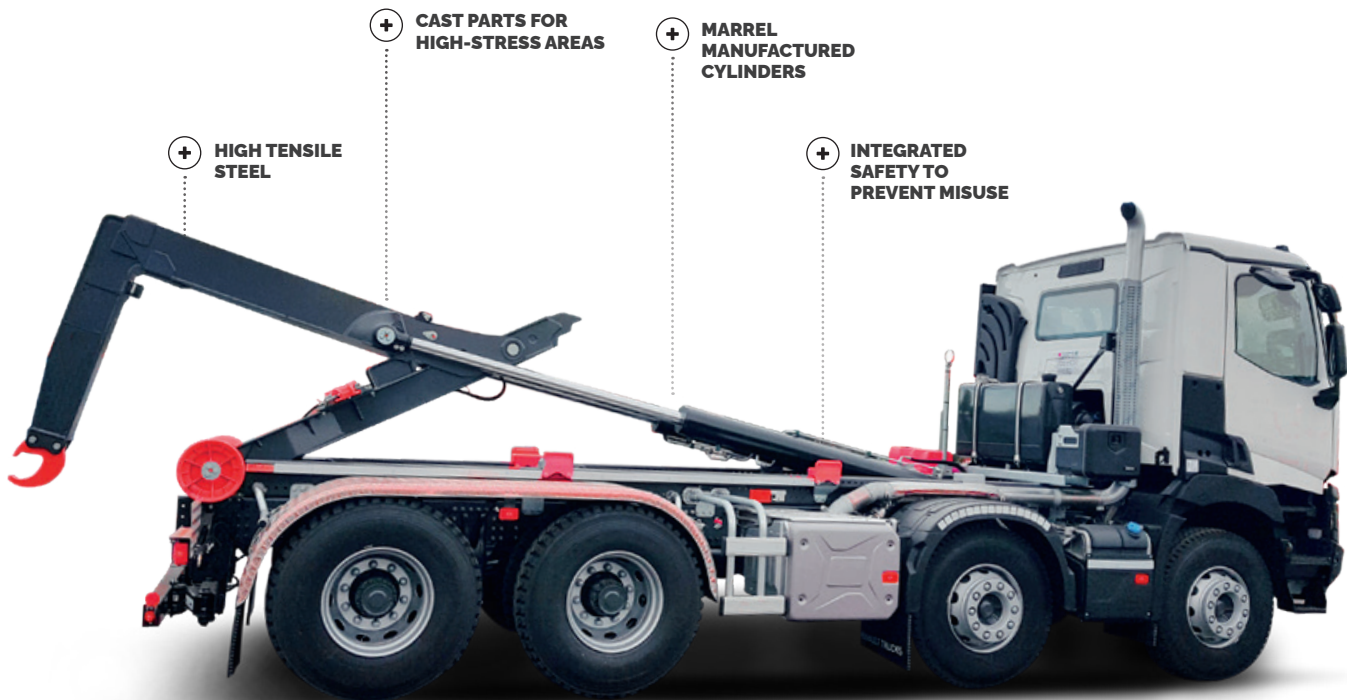
## AMPLIROLL® HIGH AL26

TELESCOPIC JIB  
LIFTING CAPACITY 26T

AMPLI'DRIVE PACKS

-  START
-  OPTI
-  PRO

 GENERATION



+ HIGH TENSILE STEEL

+ CAST PARTS FOR HIGH-STRESS AREAS

+ MARREL MANUFACTURED CYLINDERS

+ INTEGRATED SAFETY TO PREVENT MISUSE



## KEY POINTS

### POWER

Unmatched lifting capacity thanks to the **Marrel tilting frame**

### PERFORMANCE

Choose the optional **SOFT POWER** system for proportional movement and optimal comfort

### ERGONOMICS


**AMPLI'DRIVE control packs** to meet all your needs

### CUSTOMIZATION

Paint color on request and a wide range of accessories



## OPTIONS



**1** Ampli'Drive controls: pneumatic, electrical, radio controls



**2** Front hydraulic locks



**3** Rear underrun protection (RUP)



**4** Additional hydraulic lines (for cranes, rear tipper trailer...)




**5** High speed



**6** Hook with mechanical or pneumatic safety latch



**7** Vehicle stability systems



**8** Attachments brackets suited for various truck models

Other options available for custom configuration

## TECHNICAL DATA

For GVW 26 to 32 T		S49	S50	S51	S52	S53	S54	S55	S56	S57	S58	S59	S60
	Min. container length (mm)	4 300	4 300	4 300	4 300	4 700	4 700	4 700	4 700	4 700	5 200	5 200	5 200
	Max. container length (mm)	6 000	6 100	6 200	6 300	6 400	6 500	6 600	6 700	6 800	6 900	7 000	7 100
	Container length with fixed RUP (mm)	5 400	5 500	5 600	5 700	5 800	5 900	6 000	6 100	6 200	6 300	6 400	6 500
	Weight (kg)	2 550	2 560	2 560	2 560	2 600	2 620	2 620	2 620	2 740	2 750	2 750	2 760

For GVW 26 to 32 T		SL61	SL62	SL63	SL64	SL65	SL66	SL67	SL68
	Min. container length (mm)	5 200	5 200	5 200	5 600	5 600	5 600	5 600	5 600
	Max. container length (mm)	7 200	7 400	7 500	7 600	7 700	7 800	7 900	8 000
	Container length with fixed RUP (mm)	6 600	6 700	6 800	6 900	7 000	7 100	7 200	7 200
	Weight (kg)	2 790	2 820	2 850	2 880	2 910	2 940	2 970	2 970

Subject to technical modification; data not binding