


AMPLIROLL® URBAN

AL3PA

ARTICULATED JIB
LIFTING CAPACITY 3T

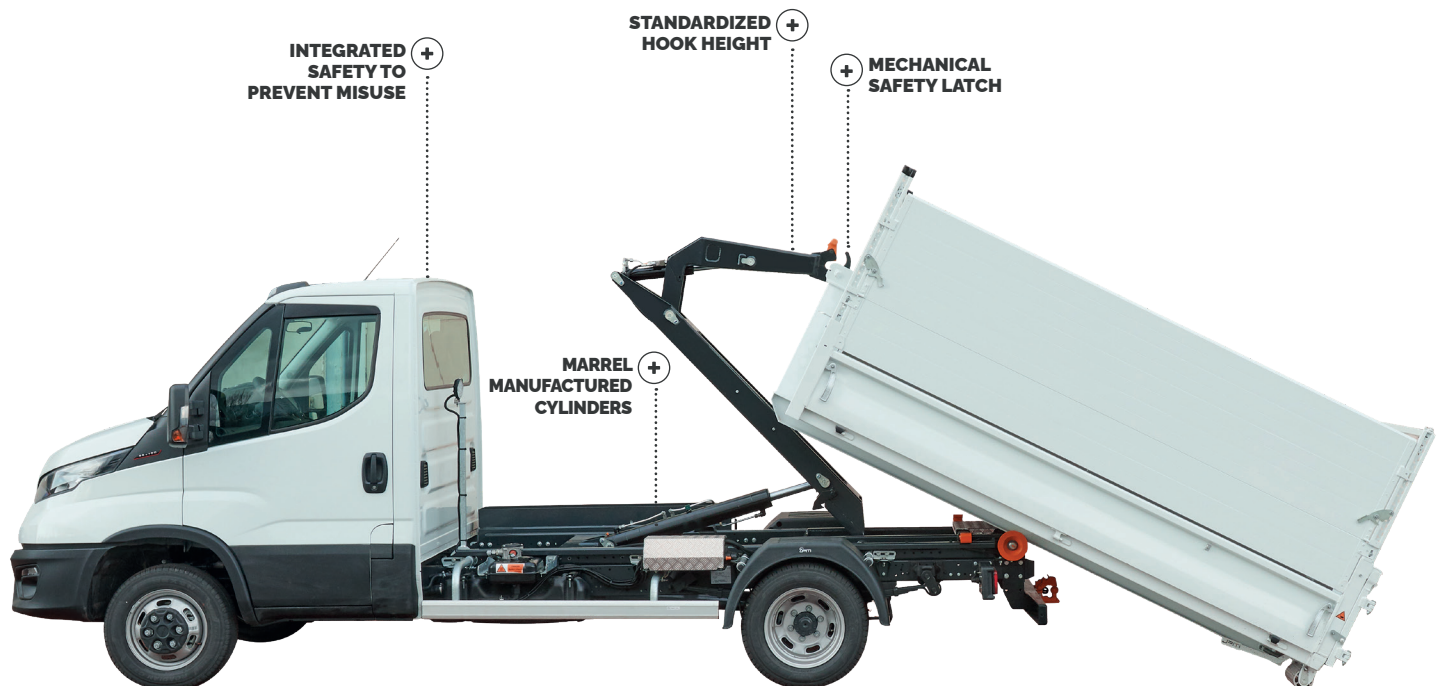

KEY POINTS

PRODUCTIVITY

Reduced loading angle and greater range of container lengths

EFFICIENCY

Unmatched **lifting capacity-to-payload ratio**

CONVENIENCE

Suitable for urban areas thanks to its **sleek design** and **reduced weight**

ADAPTABILITY

Dual-track option 1060/850 mm, allowing the handling of containers with two widths on the same equipment



OPTIONS AND ACCESSORIES




Electro pump group version



Attachments brackets suited for various truck models



850-1060 mm Track width



12V and 24V versions



Extendable rear underrun protection

Non-exhaustive list – many other options are available to customize your equipment

TECHNICAL DATA

For GVW up to 5.5 T		A26	A28	A30	A33
	Inside length of the bodies (mm)	2 800	3 000	3 200	3 500
	Tipping angle (°)	50	50	50	50
	Loading angle * (°)	30	30	30	30
	Equipment net weight (Kg)	370	380	380	420

Subject to technical changes, non-contractual data
* Chassis height 800 mm