


## AMPLIROLL® URBAN

# AL5

### TELESCOPIC JIB LIFTING CAPACITY 5T

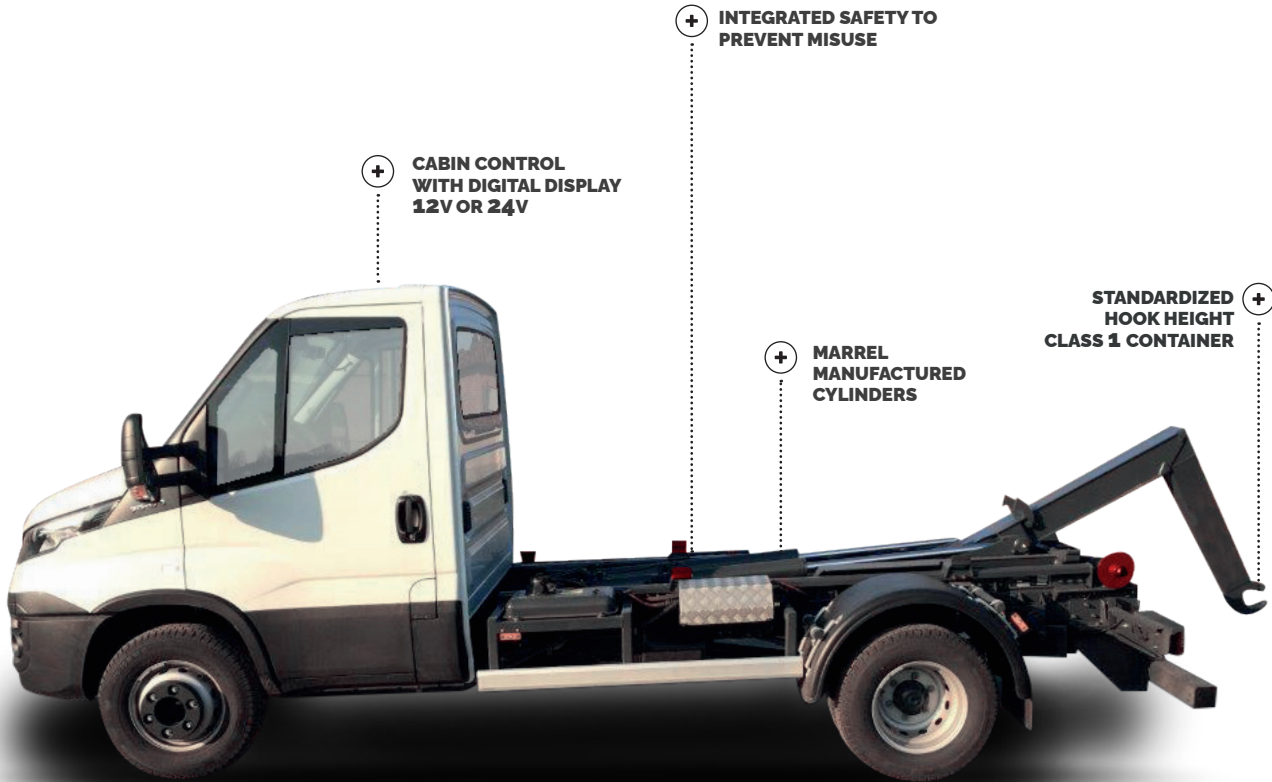

## KEY POINTS

### CONVENIENCE

Suitable for urban areas thanks to its **sleek design** and **reduced weight**

### EFFICIENCY

Unmatched **lifting capacity-to-payload ratio**

### RELIABILITY

**Integrated safety** features to reduce handling errors

### COMFORT

Magnetized removable control with digital screen



## OPTIONS AND ACCESSORIES




1 Different hook heights




2 Attachments brackets suited for various truck models



3 Rear underrun protection (RUP)



4 Cabin control 12V or 24V versions



5 Mechanical safety latch

Non-exhaustive list – many other options are available to customize your equipment

## TECHNICAL DATA

For GVW 7.5 to 10 T		A26	A27	A28	A29	A30	A31	A32	A33	A34	A35	A36	A37	A38	A39	A40
	Min. container length (mm)	2300	2300	2300	2600	2600	2600	2600	2900	2900	2900	2900	3300	3300	3300	3300
	Max. container length (mm)	3100	3400	3600	3800	3900	4000	4100	4200	4300	4400	4500	4600	4700	4800	4900
	Container length with fixed RUP	2800	2900	3000	3100	3200	3300	3400	3500	3600	3700	3800	3900	4000	4100	4200
	Weight (kg)	625	635	645	655	665	675	685	695	705	715	725	735	745	755	765

Subject to technical changes, non-contractual data