


AMPLIROLL® FLEX

AL6

TELESCOPIC JIB
LIFTING CAPACITY 6T

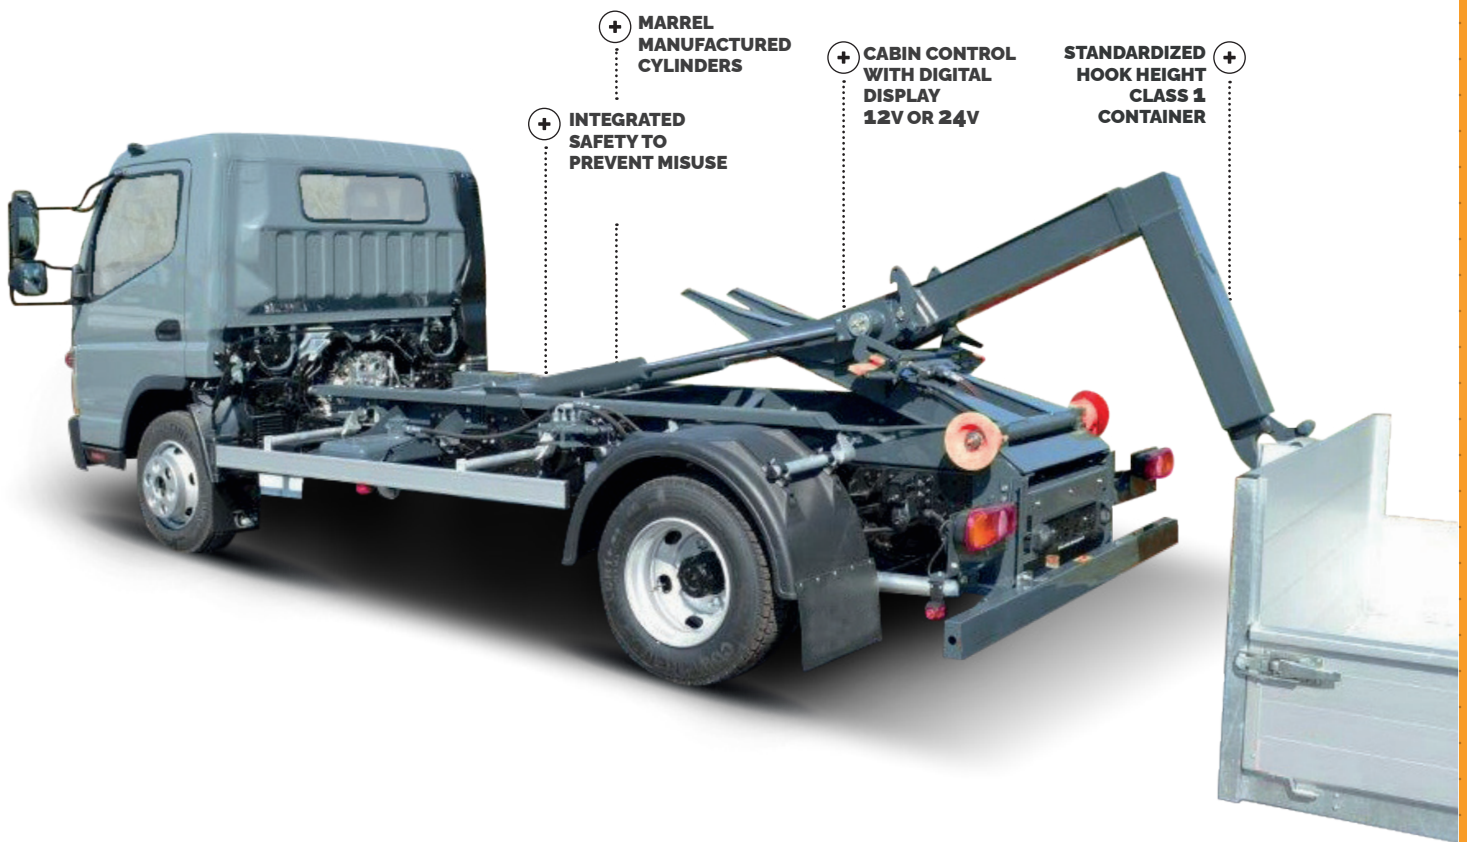

KEY POINTS

PRODUCTIVITY

Reduced weight for maximum payload capacity and improved performance

VERSATILITY

Adaptability to all chassis types, from the most compact to the most specialized

RELIABILITY

Integrated safety features to reduce handling errors

COMFORT

Magnetized removable control with digital screen



OPTIONS AND ACCESSORIES



1 Different hook heights



2 Attachments brackets suited for various truck models



3 Rear underrun protection (RUP)



4 Electric cabin control
Option: Pneumatic



5 Mechanical safety latch

Non-exhaustive list – many other options are available to customize your equipment

TECHNICAL DATA

For GVW 7.5 to 10 T		A29	A32	A33	A34
	Min. container length (mm)	2 700	3 000	3 000	3 000
	Max. container length (mm)	3 800	4 100	4 200	4 300
	Container length with fixed RUP (mm)	3 200	3 500	3 600	3 700
	Weight (kg)	700	750	750	750

Subject to technical changes, non-contractual data