


## AMPLIROLL® FLEX

# AL8

### TELESCOPIC JIB LIFTING CAPACITY 8T

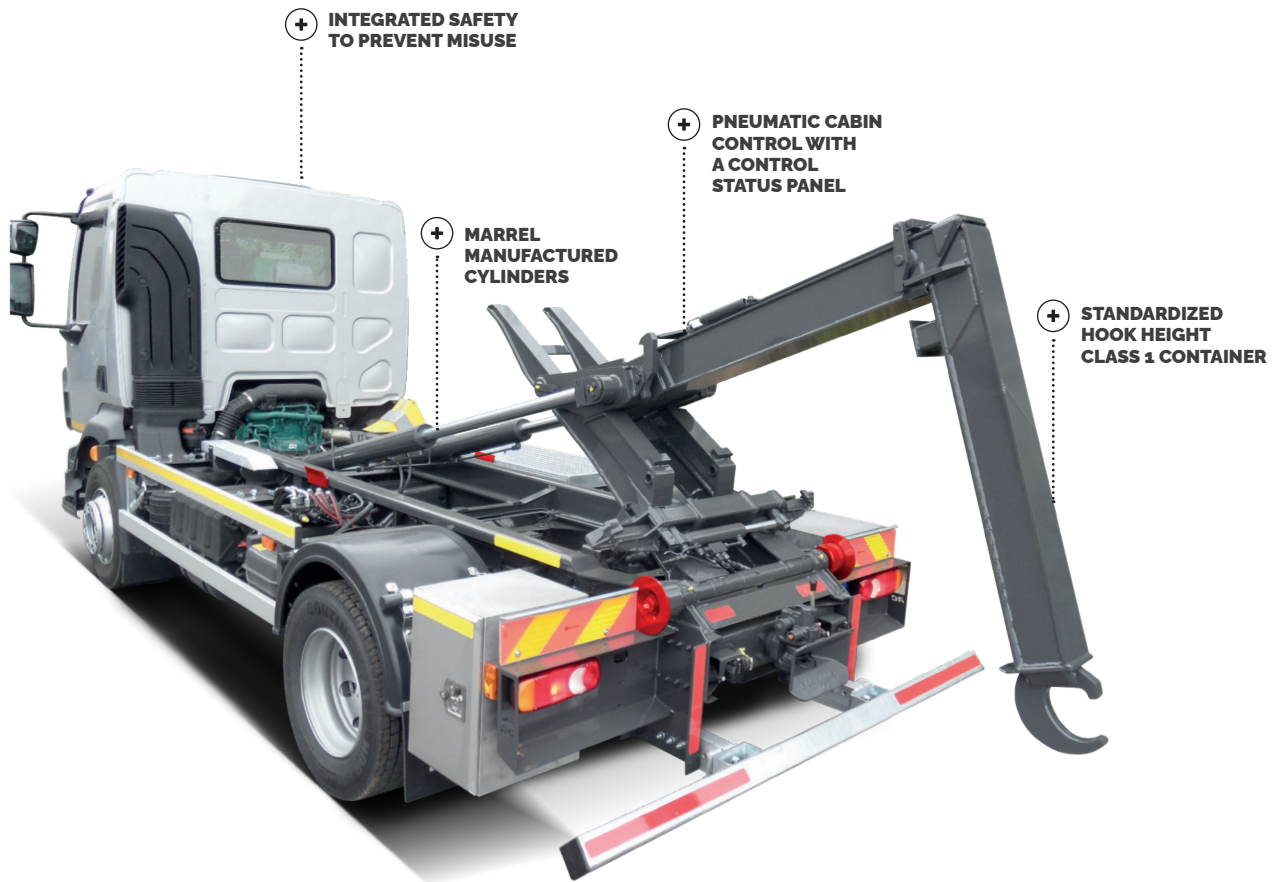

## KEY POINTS

### PRODUCTIVITY

Reduced weight for maximum payload capacity and improved performance

### VERSATILITY

Adaptability to all chassis types, from the most compact to the most specialized

### RELIABILITY

Integrated safety features to reduce handling errors

### COMFORT

Cab-mounted pneumatic control  
**Options:** electro-pneumatic control or remote radio control



## OPTIONS AND ACCESSORIES



**1** Hook with mechanical or pneumatic safety latch



**2** Front hydraulic locks



**3** Rear underrun protection (RUP)



**4** Available control options : electrical, radio controls



**5** Additional hydraulic lines (for cranes, rear tipper trailer...)



**6** Vehicle stability systems



**7** Attachments brackets suited for various truck models

Non-exhaustive list – many other options are available to customize your equipment

## TECHNICAL DATA

For GVW 9 to 15 T		A34	A35	A36	A37	A38	A39	A40	A41
	Min. container length (mm)	3300	3300	3300	3300	3300	3500	3500	3500
	Max. container length (mm)	4400	4500	4600	4800	5000	5100	5200	5300
	Container length with fixed RUP (mm)	3900	4000	4100	4200	4300	4400	4500	4600
	Weight (kg)	1000	1000	1000	1000	1030	1080	1080	1080

Subject to technical modification; data not binding