


## AMPLIROLL® HIGH

# ALBA20

TELESCOPIC JIB  
LIFTING CAPACITY **20T**

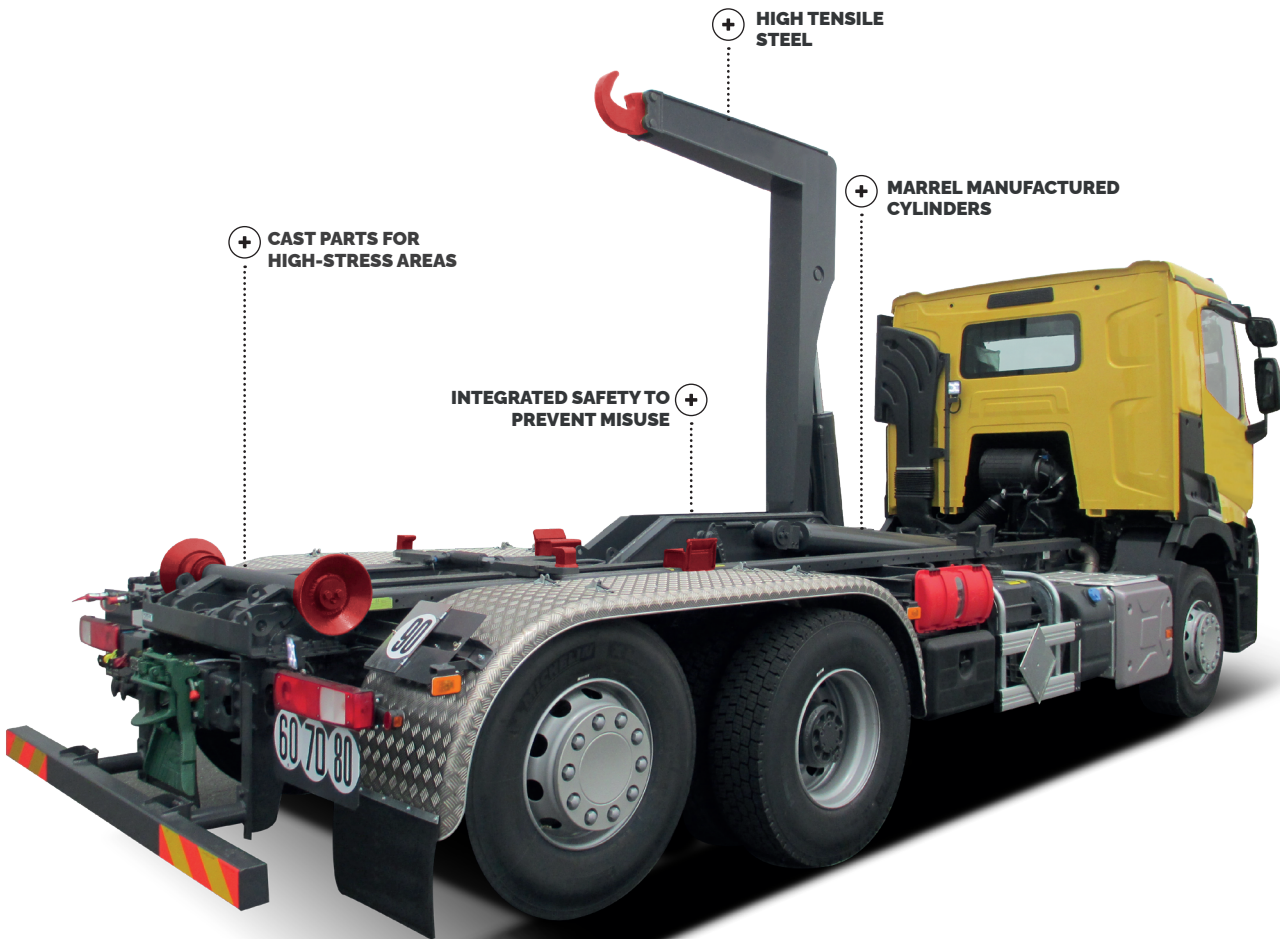

## KEY POINTS

### PRODUCTIVITY

Optimization and reduction of the loading angle

### PERFORMANCE

Below-ground-level picking and **unmatched breakout capacity**

### SAFETY

Welded hook with **pneumatic safety latch**

### COMFORT

**End-of-stroke damper** integrated into the arm cylinders



## OPTIONS




High speed



Front hydraulic locks



Rear underrun protection (RUP)




Additional hydraulic lines (for cranes, rear tipper trailer...)



Hook with mechanical or pneumatic safety latch



Vehicle stability systems



Attachments brackets suited for various truck models

Other options available for custom configuration

## TECHNICAL DATA

For GVW from 26 T		A50	A53	A56
	Min. container length (mm)	5300	5600	5900
	Max. container length (mm)	6200	6600	6900
	Container length with fixed RUP (mm)	5400	5700	6000
	Weight (kg)	2330	2400	2500

Subject to technical modification; data not binding