



TIPPER SCISSORS

2-WAY & 3-WAY



KEY POINTS

PERFORMANCE

Unrivalled lifting power ensuring smooth and safe operation

Compact size for easy integration into confined spaces

DESIGN


Optimised structure combining efficiency and aesthetics

VERSATILITY

Easy to adapt to different vehicle configurations

ROBUSTNESS

Use of high performance steel (HTS)

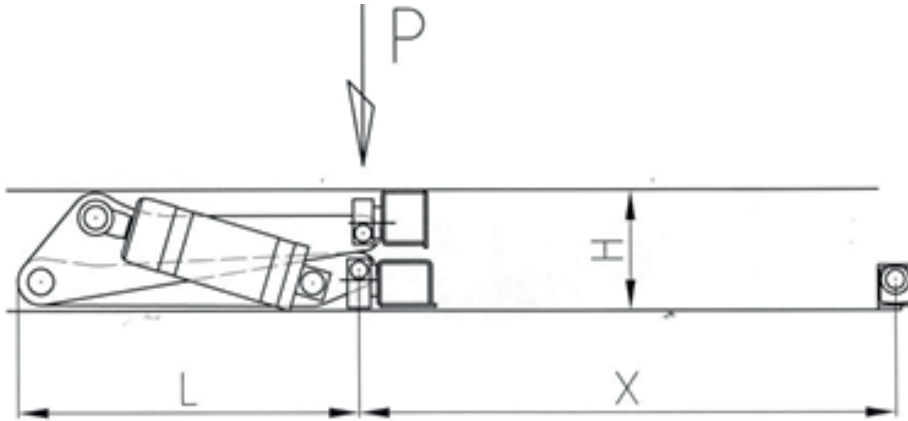

TYPE	GVW	Pressure 350 bar (T)	L (mm)	H (mm)	W (mm)	Weight (kg)	Oil Volume (L)	X (mm)	Tipping angle	
									Rear	Lateral
TIPPER SCISSORS 3W 32 T 200/615										
3W 200/615	32T 4 AXLES	28 500	1 500	480	460	550	19	2 250	57	48
								2 350	54	
								2 450	52	
								2 550	50	
								2 650	48	
TIPPER SCISSORS 3W 26 T 200/420										
3W 200/420	26T 3 AXLES	24 200	1 245	380	465	450	13	1 790	58	48
								1 890	55	
								1 990	52	
								2 090	49	
								2 190	47	
TIPPER SCISSORS 3W 19 T 150/410										
3W 150/410	19T 2 AXLES	15 850	1 185	365	395	275	7	1 615	57	48
								1 715	54	
								1 815	51	
								1 915	48	
								2 015	45	

The values and sketches indicated are not contractual. We give ourselves the right to modify them without notice.
Marrel technicians are at your service to recommend the best choice for your application